


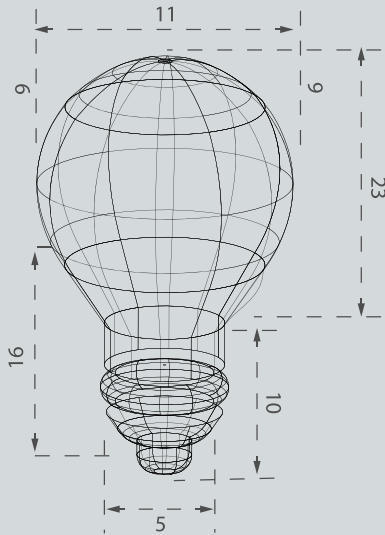

REALLY GÜD LIGHTING CONTROLLER 2001
copyright 1995 reallygudlightsandshadesco

The ReallyGüd Lighting Controller 2001 is a TCP-IP based multizone lighting controller. It communicates on a configurable port number when the server is enabled. The server supports 1-99 lighting zones with 2-99 presets per zone.

To use:

First, Enable the Server to communicate.
Secondly, configure the port to use. Typically, the device communicates on port 5104.

ASCII BYTE #	1	2,3		4	(5,6)		5, (7)
	Zone	2-Digit Zone Number (01-99)		Command	2-Digit Optional Parameter (0-99)		Terminator
Set Level	Z	0-9	0-9	L	0-9	0-9	See Below
Set Preset	Z	0-9	0-9	S	0-9	0-9	
Recall Preset	Z	0-9	0-9	R	0-9	0-9	
Get Level	Z	0-9	0-9	G	-	-	

Terminator Info:
Commands from Client terminate in \x0D
Valid responses from Server terminate in \x06
Invalid responses terminate in \x15

Examples:

DESCRIPTION		COMMAND FROM CLIENT	RESPONSE FROM SERVER
Set Level	Set Zone 1 Level to 87	Z01L87\x0D	Z01L87\x06
Set Preset	Set Zone 2 Preset 3 to current level	Z02S03\x0D	Z02S03\x06
Recall Preset	Recall Zone 3 Preset 5	Z03R05\x0D	Z03R05\x06
Get Level	Get Zone 1 Level	Z01G\x0D	Z01L87\x06